

Table lamp made of steel and aluminium with an adjustable, pivoting arm. The head can rotate 360°. The light Source is a 5W LED, controlled by an ON/OFF switch.

Finishing

Standard

● Black soft touch
cod. 09L01ST00

○ Matt white
cod. 09L02OP00

● Brushed nickel
cod. 09L4400

Special

● Matt red
cod. 09L03OP00

● Matt yellow
cod. 09L05OP00

● Metallic bronze
cod. 09L29MT00

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 530 lm
- Emitted flux: 426 lm
- Efficacy: 77 lm/W
- CCT: 3000K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts

- Source power: 5W
- Power absorbtion: 5,5W
- Stand-by absorbtion: < 0,3 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: not dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,5 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
44 x 17 x 11 (cm)
0,008 m³

Gross weight
1,8 Kg

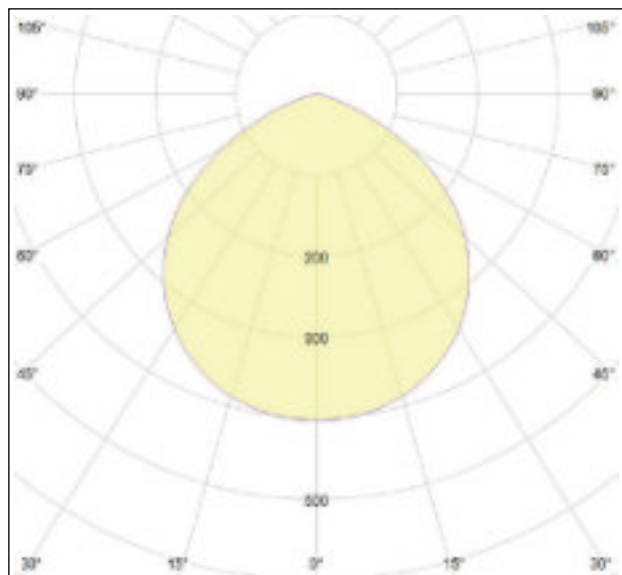
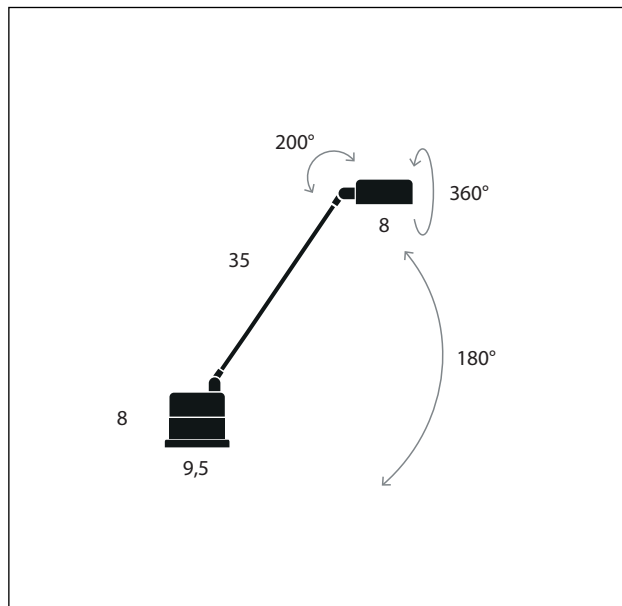




Table lamp made of steel and aluminium with an adjustable, pivoting arm. The head can rotate 360°. The light Source is a 5W LED, controlled by an ON/OFF switch.

Finishing

Standard

● Black soft touch
cod. 09L01STK27

○ Matt white
cod. 09L02OPK27

● Brushed nickel
cod. 09L44K27

Special

● Matt red
cod. 09L03OPK27

● Matt yellow
cod. 09L05OPK27

● Metallic bronze
cod. 09L29MTK27

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 513 lm
- Emitted flux: 410 lm
- Efficacy: 74,5 lm/W
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 5W
- Power absorbtion: 5,5W
- Stand-by absorbtion: < 0,3 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: not dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,5 Kg
- Certifications: CE
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
44 x 17 x 11 (cm)
0,008 m³

Gross weight
1,8 Kg

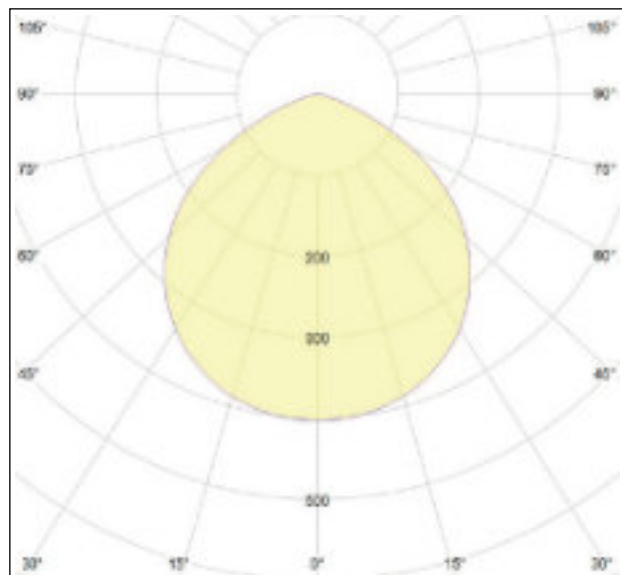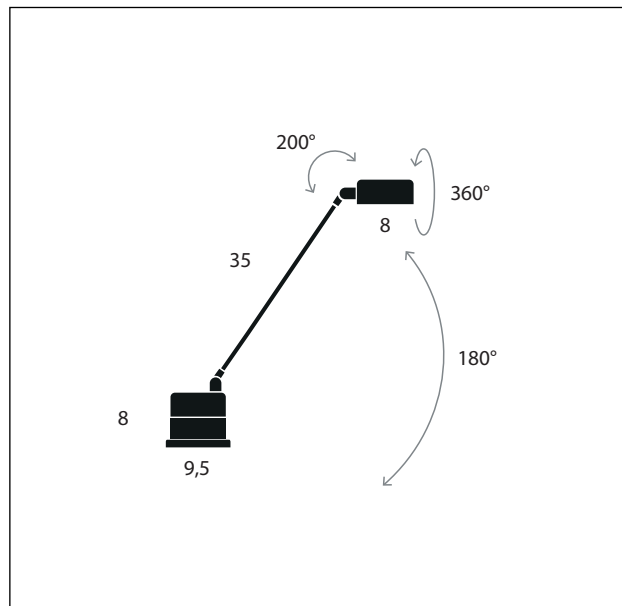

Daphinette

design Tommaso Cimini, 1975



release 2019, December




Table lamp made of steel and aluminium with an adjustable, pivoting arm. The head can rotate 360°. The light Source is a 5W LED, controlled by an ON/OFF switch.

Finishing

Standard

● Black soft touch
cod. 09L01ST00ETL

○ Matt white
cod. 09L02OP00ETL

● Brushed nickel
cod. 09L4400ETL

Special

● Matt red
cod. 09L03OP00ETL

● Matt yellow
cod. 09L05OP00ETL

● Metallic bronze
cod. 09L29MT00ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 530 lm
- Emitted flux: 426 lm
- Efficacy: 77 lm/W
- CCT: 3000K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts



- Source power: 5W
- Power absorbtion: 5,5W
- Stand-by absorbtion: < 0,3 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: not dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,5 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
44 x 17 x 11 (cm)
0,008 m³

Gross weight
1,8 Kg

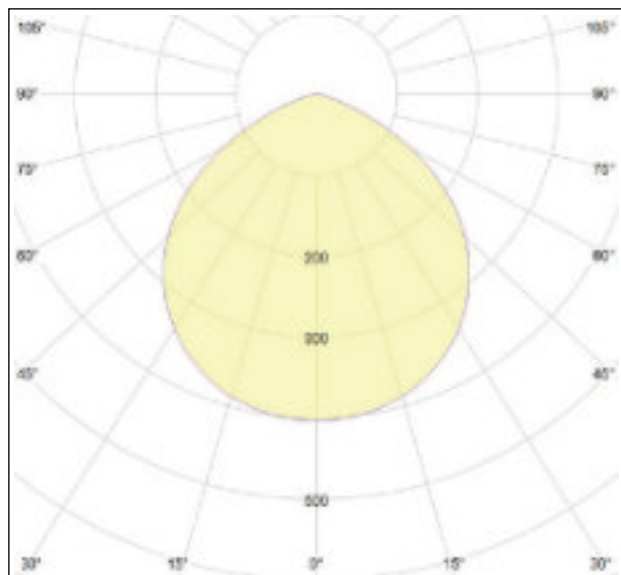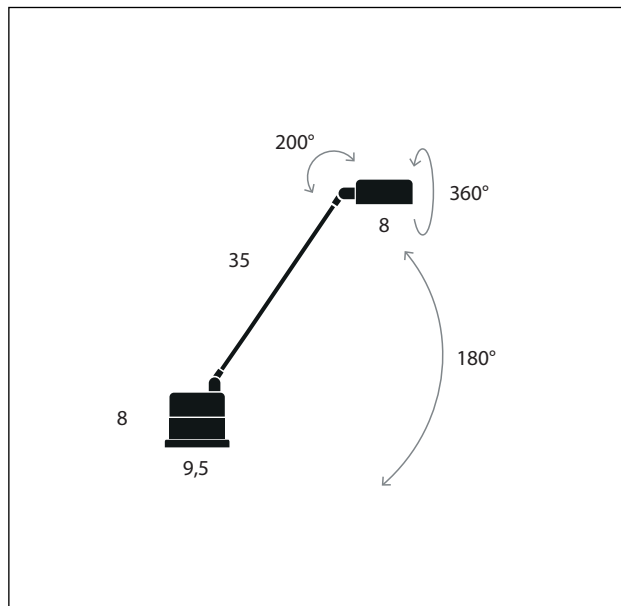

Daphinette

design Tommaso Cimini, 1975

release 2019, December




Table lamp made of steel and aluminium with an adjustable, pivoting arm. The head can rotate 360°. The light Source is a 5W LED, controlled by an ON/OFF switch.

Finishing

Standard

 Black soft touch
cod. 09L01STK27ETL

 Matt white
cod. 09L02OPK27ETL

 Brushed nickel
cod. 09L44K27ETL

Special

 Matt red
cod. 09L03OPK27ETL

 Matt yellow
cod. 09L05OPK27ETL

 Metallic bronze
cod. 09L29MTK27ETL

All RAL coating and galvanic finishes available upon request

Light emission

- Light emission: diffuse
- Light direction: downlight
- Light source: led board
- Source flux: 513 lm
- Emitted flux: 410 lm
- Efficacy: 74,5 lm/W
- CCT: 2700K
- CRI index: 97
- Lifetime: >55000h L80 @ 25°C

Electrical Facts

- Source power: 5W
- Power absorbtion: 5,5W
- Stand-by absorbtion: < 0,3 W
- Grid voltage: 100-240V AC/50-60 Hz
- Power supply: internal AC-DC converter provided
- Dimmability: not dimmable
- Energy class: A++

Technical data

- Environment: indoor
- Placement: table
- Net weight: 1,5 Kg
- Certifications: ETL
- Suggested ambient T: 25°C
- Maximum ambient T: 40°C
- Insulation class: II
- Protection class: IP20

Packaging
cardboard box
44 x 17 x 11 (cm)
0,008 m³

Gross weight
1,8 Kg

