


## Sticks \_Wall - ceiling lamp



The Sticks wall/ceiling lamp features a linear composition with two cylindrical diffusers in satin-finish opal polycarbonate, mounted on a die-cast aluminum frame painted matte white. It can be installed either on the wall or ceiling and oriented vertically or horizontally, offering excellent design flexibility. The family is available in three sizes, with overall heights of 50 cm, 71 cm and 93 cm. All models use LED technology with TRIAC dimming and allow selection of the color temperature (2200 K, 2700 K, 3000 K or 4000 K). The IP54 protection rating makes the lamp suitable for indoor spaces, including humid environments such as bathrooms or above-mirror areas. The Sticks wall/ceiling versions are ideal for corridors, entrances, kitchens, living areas and hospitality projects. The two diffusers create a soft and continuous line of light that can be used individually or repeated to enhance surfaces with a discreet and functional luminous sign.

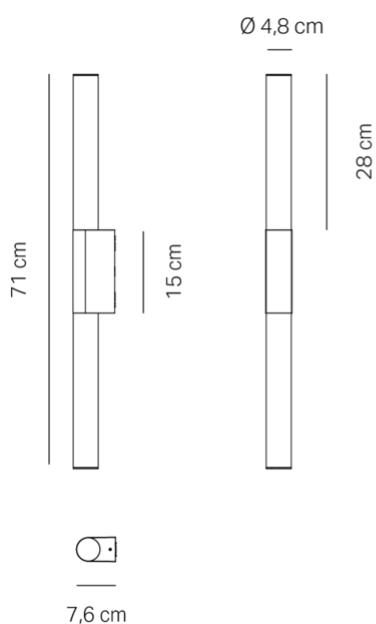

LED dimmable IP54

**LD9612**

White **B3**



**DESIGN IN ITALY BY ZAFFERANO SRL, MADE IN PRC**

Zafferano SRL - Viale dell'Industria, 26 31055 Quinto di Treviso - Italy [www.zafferanoitalia.com](http://www.zafferanoitalia.com)

# Sticks \_Wall - ceiling lamp

| Lighting specifications |                                      | Electrical specifications |          |
|-------------------------|--------------------------------------|---------------------------|----------|
| source                  | LED                                  | class                     | 1        |
| type                    | SMD                                  | voltage                   | 220-240V |
| total power             | 23 W                                 | frequency                 | 50/60 Hz |
| power LED               | 2x10 W                               | driver input              | 220-240V |
| color temperature       | 2200 - 2700 - 3000 - 4000 K          | driver output             | 600 mA   |
| lumen lamp              | 1392 - 1498 - 1534 - 1638 lm         |                           |          |
| lumen LED               | 2x1288 - 2x1386 - 2x1419 - 2x1517 lm |                           |          |
| beam angle              | 360°                                 |                           |          |
| CRI                     | > 90                                 |                           |          |
| source class            | E                                    |                           |          |
| dimmer                  | TRIAC                                |                           |          |
| motion sensor           | NO                                   |                           |          |

## ACCESSORIES